

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.






REV.	ECN. NO.	APPD.
------	----------	-------



NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES

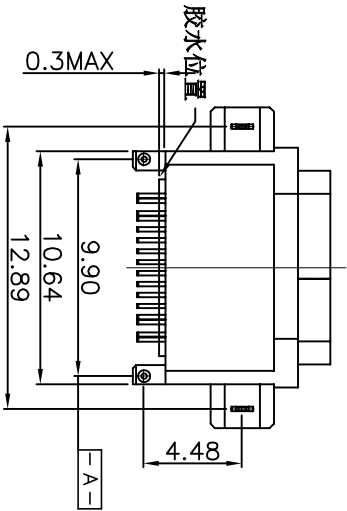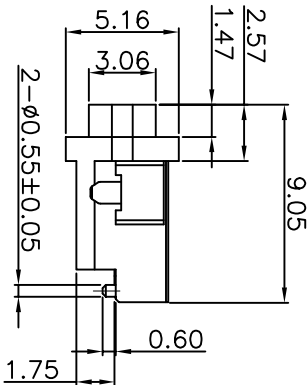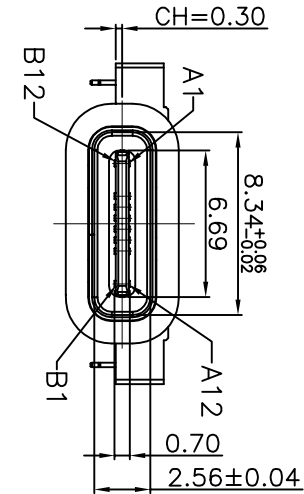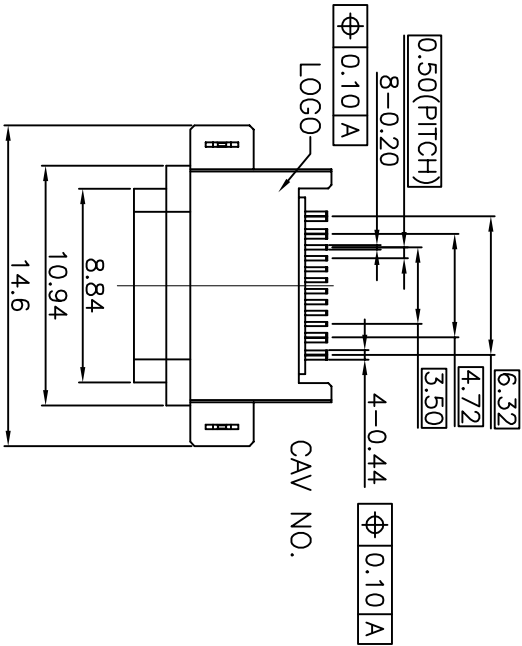

4	Shell2	1	SUS304 Ni Plating T=0.20mm	Ni:40~120u''
3	Shell	1	PA9T(G.F30%)	
2	Contact	5	Copper alloy C7025 Au/Ni Plating Au:1u'' Ni:50~80u'' Contact area:Au=3u''	T=0.15mm
1	Housing	1	PA9T(G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE
X.	±0.50	X°	± 2°	
X	±0.30	X°	± 1°	
.XX	±0.10	.XX°	± 0.5°	
.XXX	± 0.05			
		MAT'L		
		PART NO		
		EZ-USBC-1121		
		TITLE:		
		TYPE C 2.0 16Pin	SMT Type	
		DWG NO:		
		APPD: RADOM		
		CHKD: MARK		
		DRE: JANE CHOU 2020/09/26		
		EZ-USBC-1121		
		SCALE	SHEET	REV.
		1/1	1/2	A2

深圳市合众益华科技有限公司

