

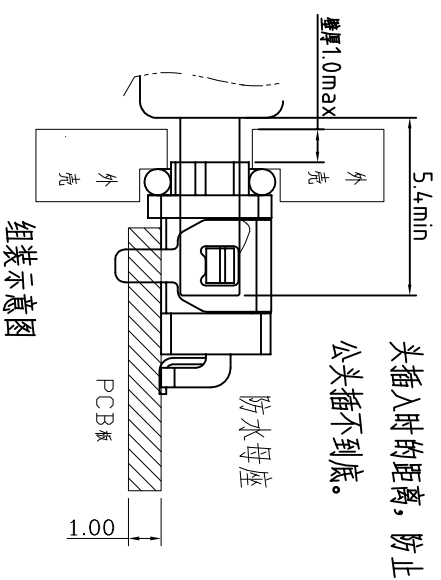





图 示 装 组




THICKNESS $T=1.0\text{mm}$

DEFAULT TOLERANCE+/-0.05

1. ELECTRICAL CHARACTERISTICS:
 - 1.1. RATING: 3A(PIN1&5),0.5A(PIN2&3&4);
 - 1.2. CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - 1.3. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - 1.4. INSULATION RESISTANCE: 1000MΩ MIN.;
2. DURABILITY: 5,000 CYCLES MIN.;
3. INSERTION FORCE: 3.5Kgf (35N) Max.;
4. EXTRACTION FORCE: 0.8Kgf (8N) Min.;
5. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8
6. PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
7. PACKAGING: TAPE & REEL.

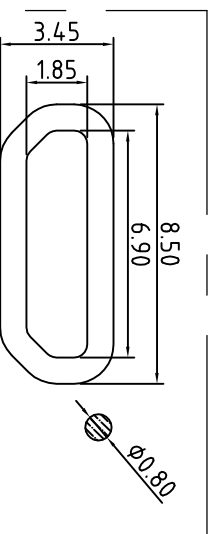

注: 防水圈是圓形截面, 直徑為 0.8mm 的柱狀圓
防水圈擠壓量, 由 0.8mm 擠壓到 0.4mm ~ 0.5mm, 防水效果好

3	Shell	1	SUS304R-1/2H	Ni	Plating	T=0.25mm
2	Contact	5	Phosphor bronze C5191R-EH	Au/Ni	Plating	T=0.20mm
1	Housing	1	PA10T (G.F30%)			
ITEM	PARTNAME	Q'TY	FINISH		NOTE	
X.	±0.50	X.* ±2°	深圳市合众益华科技有限公司			
.X	±0.30	.X.* ±1°				
.XX	±0.10	.XX.* ±0.5°				
XXX	±0.05					
THESE DIMENSIONS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED OR TRANSMITTED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.			TITLE: Micro USB S _{Pin} SMT (B) Type (标准品)			
FINISH			DWG. NO.: EZ-USB-1197			
APPD: RADDM			EZ-USB-1197			
CHKD: MARK						
Q'TY			DR: WU 2019/07/08			
			SCALE SHEET REV. 1/1 1/1 A1			