


1



2

3





4

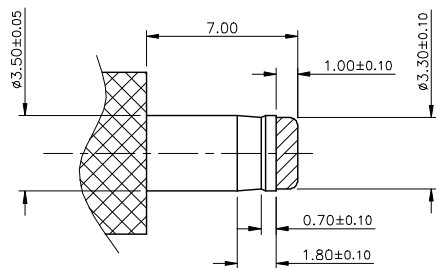


(Ø3.50mm DC PLUG DETAIL DRAWING)

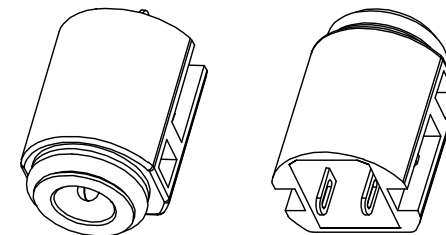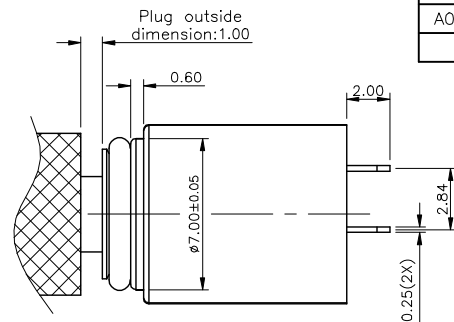

3D VIEW

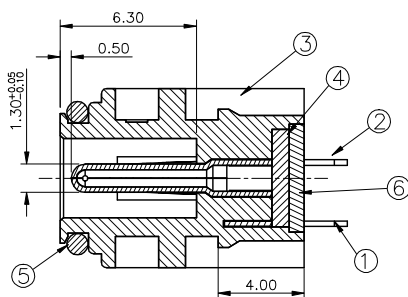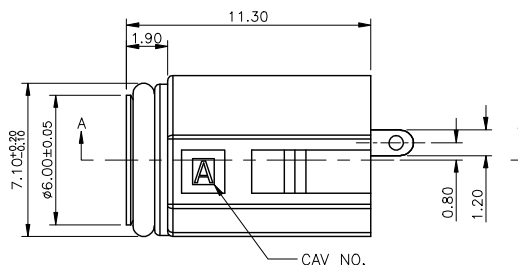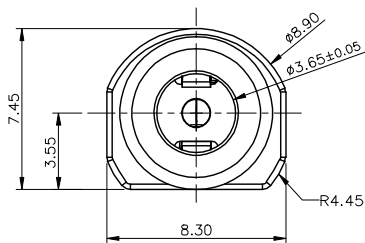

SECTION A-A



SCHEMATIC

NOTES:

1. CONTACT CURRENT RATING: 3A;
2. CONTACT RESISTANCE: 60 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. INSERTION FORCE: 0.3~3.0kgf (3~30N);
7. EXTRACTION FORCE: 0.3~3.0kgf (3~30N);
8. WATERPROOF STRENGTH: IP-X7.
9. PRODUCT MEET THE REQUEST OF THE RoHS.

06	GLUEWATER		环氧树脂 (EA235) 单组份	BLACK
05	O型圈	1 PCS	硅胶	RED UL 94V-0
04	COVER	1 PCS	PA66+30%GF	BLACK UL 94V-0
03	HOUSING	1 PCS	PA66+30%GF	BLACK UL 94V-0
02	PIN	1 PCS	BRASS T=0.25mm	1u" Au ALL OVER
01	CONTACT A	1 PCS	STAINLESS STEEL T=0.25mm	1u" Au ALL OVER
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION

This document is
the property of E-ZONE
development corporation.

Unless Otherwise
specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGLES ±3°

深圳市合众益华科技有限公司

DESIGN: C C	DATE: 2016.01.11	TITLE: DC POWER JACK CUSTOMER DRAWING	
CHECKED:	DATE:		
APPROVED:	DATE:	REV.: A0 SCALE: 3:1 UNIT: mm	
PART NO.: EZ-DS-0317D20	DATE:		
DRAWING NO.:	DATE:	SIZE: A4	SHEET: 1/1

1

2

3

4