









1

2

3

4

REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
AO	N/A		INITIAL RELEASE	2016.01.11
				张丙行

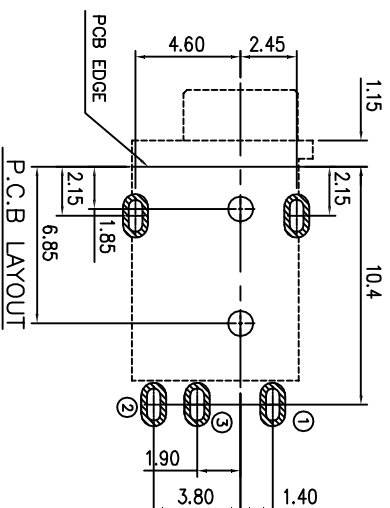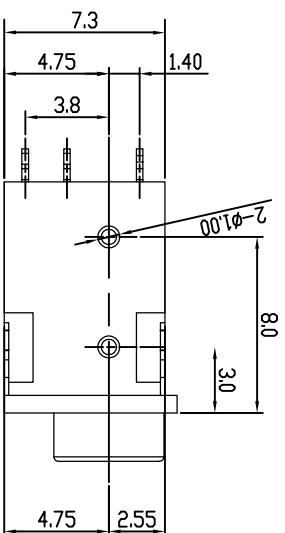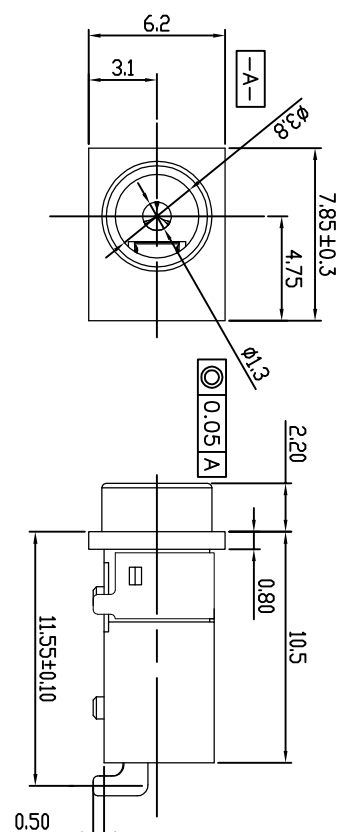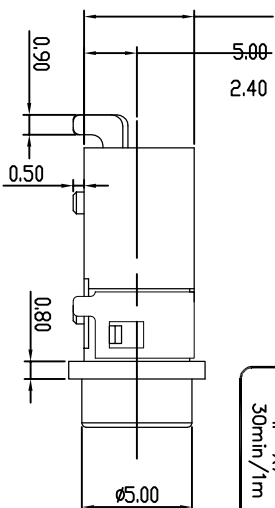

DC PLUG-REF

SCHEMATIC

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - RATING: DC 3A 12V
 - CONTACT RESISTANCE: 30mΩ MAX(INITAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 100MΩ MIN, MEASURED BY 500V DC
- MECHANICAL PERFORMANCE
 - OPERATING FORCE :0.5-2.0kgf
- LIFE TEST
 - 1.ELECTRONICS LIFE TEST 5,000 CYCLES.

NO.	PARTS	MATERIAL	QTY.	FINISHING
4	TERMINAL 3	C2680-H	1	Au PLATED
3	TERMINAL 1,2	C5210-H	2	Au PLATED
2	INSERT MOLDING	PA10T UL94-V0	1	BLACK
1	HOUSING	PA10T UL94-V0	1	BLACK

Unless Otherwise specified, Tolerance: X.x ±0.30 X.xx ±0.20 X.xxx ±0.15 X.xxx ±0.10 ANGLES ±3°		DESIGN: C C DATE: 2016.01.11		TITLE: DC POWER JACK CUSTOMER DRAWING	
the property of E-ZONE development corporation.		CHECKED: DATE:		REV: A0 SCALE: 3:1 UNIT: mm	
		APPROVED: DATE:		SHEET: 1/1	
		PART NO.: EZ-DS-0318			
		DRAWING NO.:			

深圳市合众益华科技有限公司