
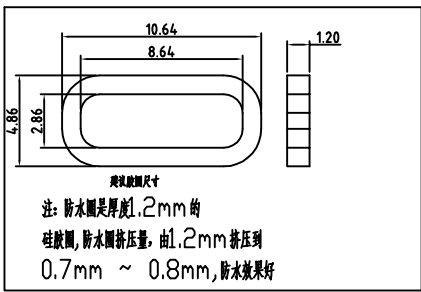
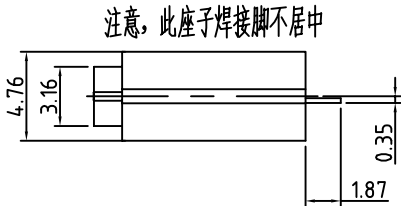



CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

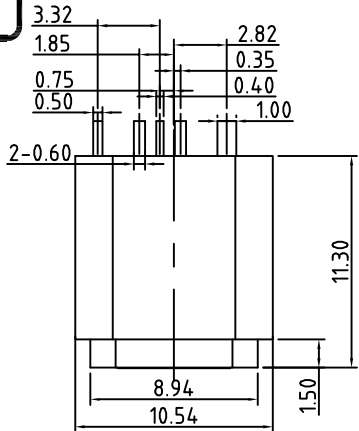


INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND				CC1				VBUS			
GND				DN2		DP2		VBUS			
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A1&B12	A5	B7	B6	A9&B4
SIGNAL NAME	GND	CC1	DN2	DP2	VBUS
PCB PAD NO.	C1	C2	C3	C4	C5

注意, 此座子焊接脚不居中

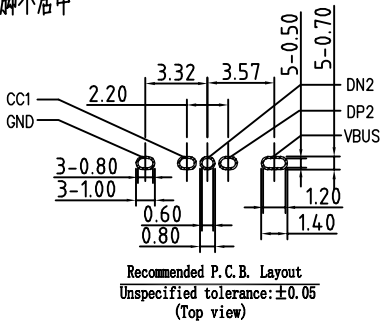


RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

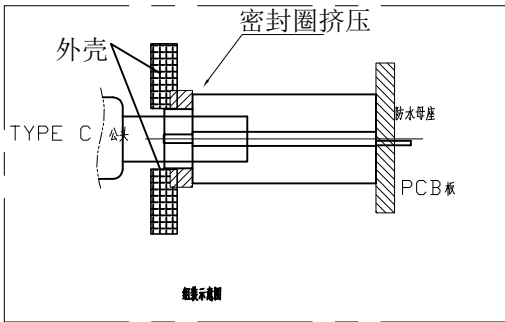

ITEM	PARTNAME	Q'TY	FINISH	NOTE
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni40~120u'
3	Housing2	1	LCP(G.F30%)	
2	Contact	4	Phosphor bronze C5191R-H Au/Ni Plating T=0.25mm	Ni40~160u'; AuCONTACT AREA:3u'
1	Housing	1	PA9T (G.F30%)	

X.	±0.50	X.*	± 2°	UNITS	mm
.X	±0.30	.X.*	± 1°		
.XX	±0.10	.XX.*	± 0.5°	MAT'L	
.XXX	± 0.05				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD

FINISH
Q'TY

深圳市合众益华科技有限公司


PART NO.
EZ-USBC-1148-113

TITLE:
TYPE C 7Pin(焊脚5PIN)
立式 TYPE-C 带中夹片 H11.3

APPD: RADDM
CHKD: MARK

DWG NO.:
EZ-USBC-1148-113

DR: wu.jy 2022/02/02



SCALE SHEET REV.
1/1 1/2 A1