



CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

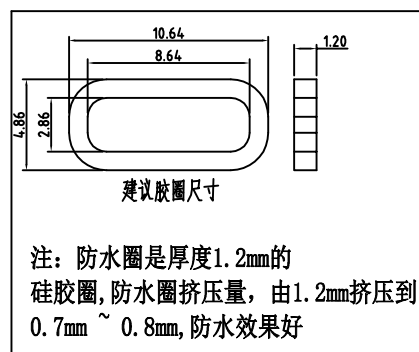


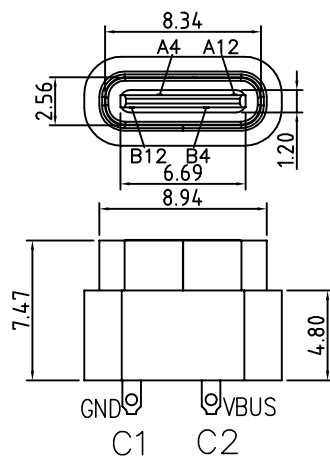

REV.	ECN. NO.	APPD.

INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								
GND								VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SIGNAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

组装示意图 公头参考尺寸7.0 设计时
注间外壳厚度, 避免公头插不到底

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

4	Shell	1	SUS304 Ni Plating T=0.30mm	Ni40~120u'
3	Housing2	1	LCP(G.F30%)	
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni40~160u' Au CONTACT AREA:3u' OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PARTNAME	Q'TY	FINISH	NOTE

X.	±0.50	X.*	± 2°	UNITS	mm
.X	±0.30	.X.*	± 1°		
.XX	±0.10	.XX.*	± 0.5°	MAT'L	
.XXX	± 0.05				

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF E-ZONE
ELECTRONIC TECHNOLOGY
CO.,LTD AND SHALL NOT BE REPRODUCED,
COPIED OR USED IN ANY MANNER WITHOUT
THE PRIOR WRITTEN CONSENT OF
E-ZONE ELECTRONIC TECHNOLOGY
CO., LTD

FINISH

Q'TY

深圳市合众益华科技有限公司			
PART NO.	TITLE:		
EZ-USBC-1128-2P	2PIN TYPE C		
APPD: RADOM	DWG NO:		
CHKD: MARK	EZ-USBC-1128-2P		
DR: wu.jy 2021/02/02			
		SCALE	SHEET
		1/1	1/2
		REV.	A1

