

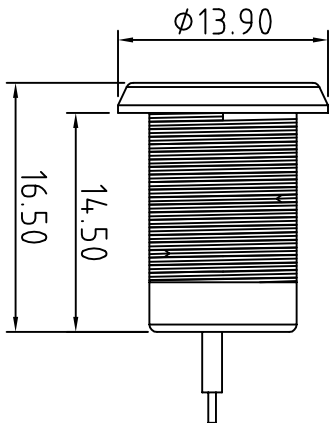


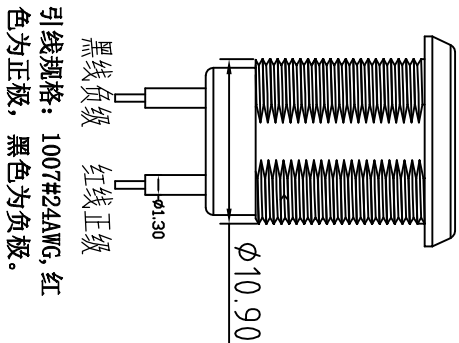


A9	VBUS	B9	VBUS
A1	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

组装示意图

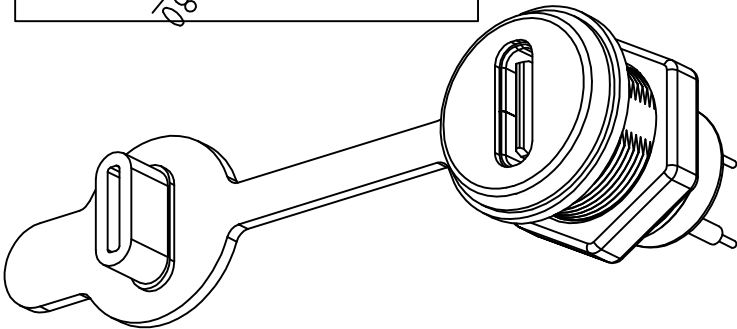


黑线负级 红线正级



1. Rating: DC5V/9V 3A:

2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100 M\Omega$ (DC250V)
4. Withstand voltage: 500VAC;
5. Insertion and extraction force: 5-20N
6. Life test: 10000 cycles;

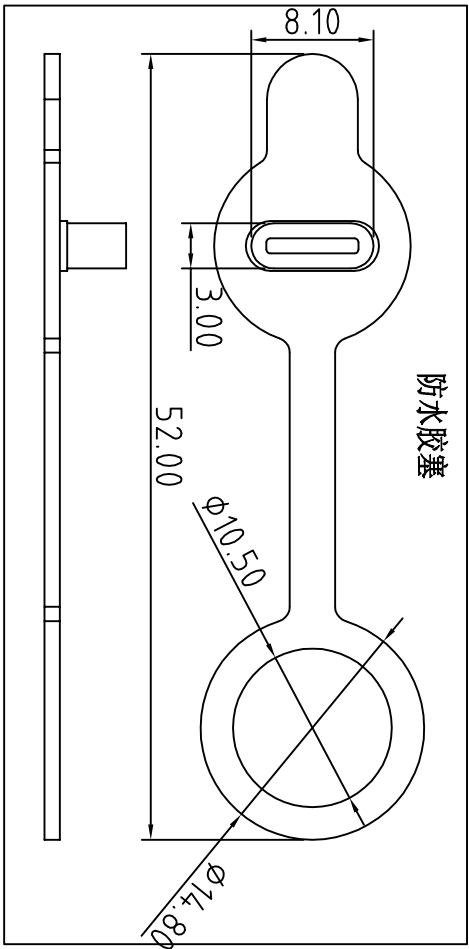

X. ±0.50		X.* ±2°	UNITS mm	深圳市合众益华科技有限公司	TITLE: TYPE C 2P焊线带外螺牙螺母	DWG NO.:	EZ-USBC-3007					
.X ±0.30		.X.* ±1°										
.XX ±0.10		.XX.* ±0.5°	PART NO. EZ-USBC-3007									
.XXX ±0.05		MAT'L _____										
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EZ-ZONE ELECTRONIC TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF EZ-ZONE ELECTRONIC TECHNOLOGY CO.,LTD			FINISH _____									
										Q'TY _____		
			APPD: RADDM								CHK'D: MARK	DR: JGIN 2018/05/18
			EZ-USBC-3007							SCALE		
		1/1	1/2							A1		