




M11螺母标配铁镀白锌，可定制不锈钢/铜。

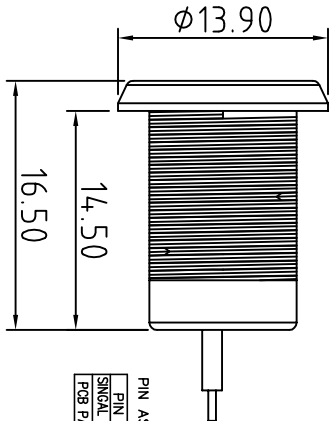


组装示意图

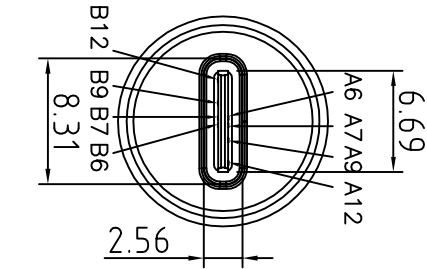

INTERFACE(FRONT VIEW)															
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12				
					DP1	DN1		VBUS							
GND					DN2	DP2					GND				
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1				




PIN NO.	A9A8B9	K7A8B7	A6A8B6	A1A8B12
SIGNAL NAME	VBUS	DN1&DN2	DP1&DP2	GND
PCB PAD NO.	C1	C2	C3	C4

由Autodesk 教育版产品制作

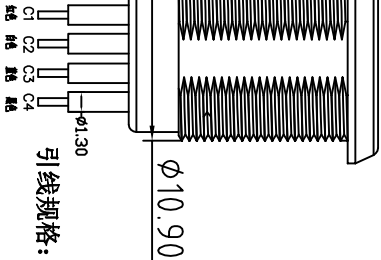

引线规格: 1007#24AWG

PIN ASSIGNMENT									
PIN NO.	A9A8B9	B7	B6	A1A8B12					
SIGNAL NAME	VBUS	DN2	DP2	GND					
PCB PAD NO.	C1	C2	C3	C4					

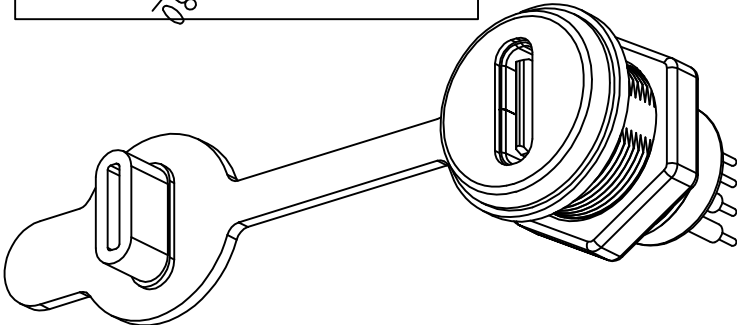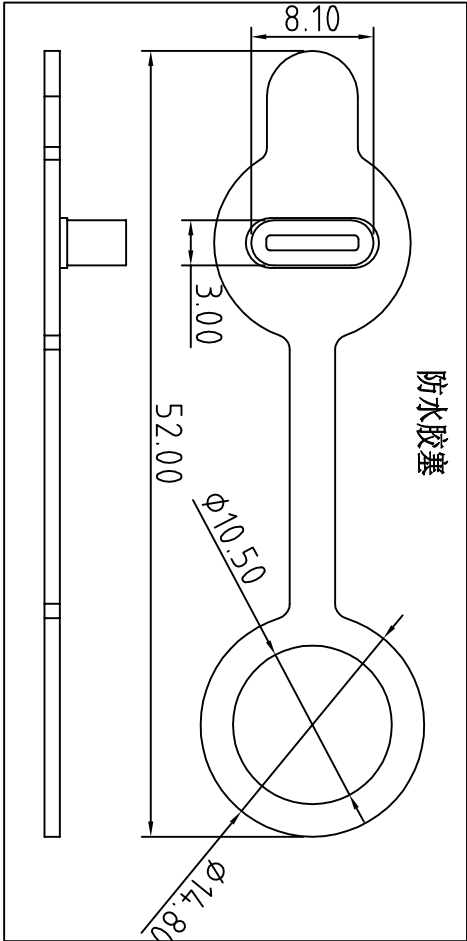

SPECIFICATION

1. Rating:DC5V/9V 3A:
2. Contact resistance:≤0.03Ω:
3. Insulation resistance:≥100MΩ (DC250V)
4. Withstand voltage:500VAC:
5. Insertion and extraction force:5~20N
6. Life test:10000 cycles:

X.	±0.50	X.*	± 2°	UNITS	深圳市合众益华科技有限公司	
.X	±0.30	.X*	± 1°	mm		
.XX	±0.10	.XX*	± 0.5°	MAT'L		
.XXX	± 0.05					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD					FINISH	
					Q/TY	
					DR.	JOIN 2018/05/18
					APPD:	
					CHKD:	
					MARK	
					DR.	JOIN 2018/05/18
					SCALE	1/1
					SHEET	1/2
					REV.	A1