



CAD GENERATED DRAWING. DON'T CHANGE BY HAND.


由 Autodesk 教育版产品制作

INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	GND	VBUS	CC1	DP1	DN1	SBU1	VBUS	GND	GND	VBUS	CC2
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A1&B12	A4&B9	B8	A5	B7	A6	A7	B6	A8	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	SBU2	CC1	DN2	DP1	DN1	DP2	SBU1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12

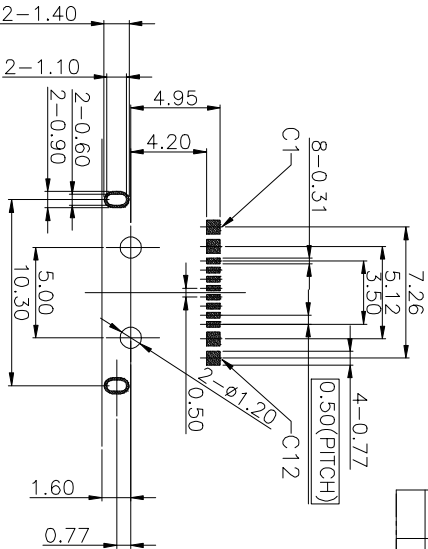

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

- NOTES:
1. MATERIAL: SEE "TABLE 1"
 2. FINISH: SEE "TABLE 1"

3. ELECTRICAL :
3-1. CONTACT CURRENT RATING :
5A(BUS PIN 1.5A/PIN),
5A(GND PIN 1.25A/PIN MAX)0.25A/PIN(OTHER PIN),
3-2. INSULATION RESISTANCE :
100 MEGAOHMS MIN. AT 250VDC.
3-3. DIELECTRIC WITHSTANDING VOLTAGE :
100VAC MIN.
3-4. LOW LEVEL CONTACT RESISTANCE :
INITIAL 40mΩ MAX.
AFTER 50mΩ MAX.

4. MECHANICAL CHARACTERISTICS :

- 4-1. MATING FORCE: 5~20N
- 4-2. UNMATING FORCE: 8~20N(NIPLA)6~20N(AFTER 10000 CYCLES);
- 4-3. DURABILITY : 10,000 MATING CYCLES.
- 4-4. OPERATING TEMPERATURE : -40°C TO +80°C

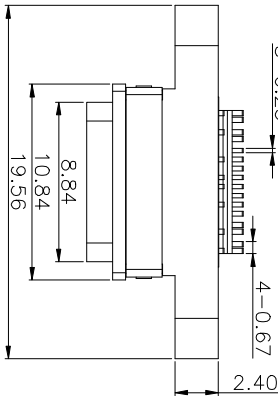
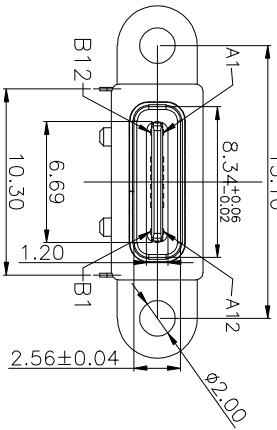
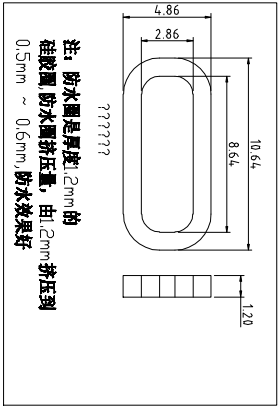
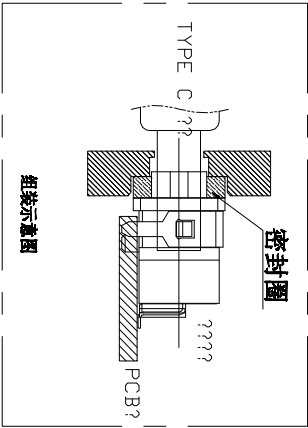


TABLE 1:

⑥	Shell-2	1	Stainless steel	NI PLATING:	T=0.20mm
⑤	Shell-1	1	Stainless steel	NI PLATING:	T=0.25mm
④	MID PLATE	1	Stainless steel		T=0.15mm
③	Terminal-B	8	铜镍合金	Au30% PLATING:	T=0.15mm
②	Terminal-A	8	铜镍合金	Au30% PLATING:	T=0.15mm
①	Housing	1	HIGH TEMP	Black	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK

深圳市合众益华科技有限公司

PART NO.
EZ-USBC-1119-U

TITLE:
TYPE C 16Pin SMT Type 封装

APPD: RADDM

DWG NO:
EZ-USBC-1119-U

CHKD:

SCALE SHEET REV.

DR: WUYI 2020/08/18

1/1 1/2 A1

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作