








A

B

D

E

REV.		ECN NO.		LOCATION		REVISIONS		DESCRIPTION		DATE		DESIGN		CHECKED		APPROVED	
X1																	

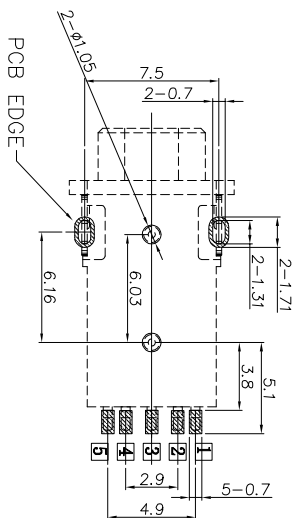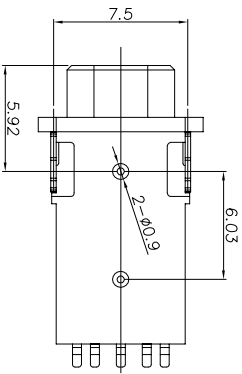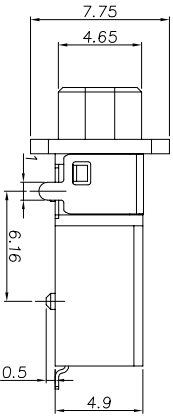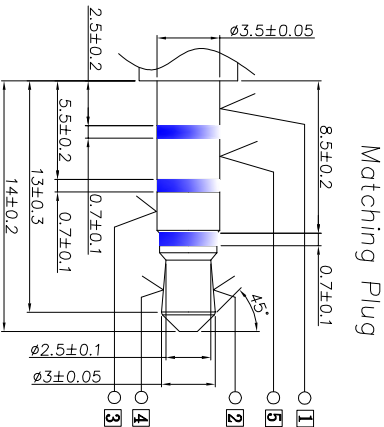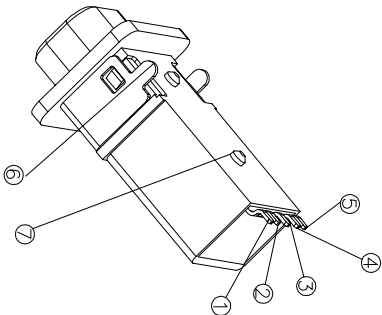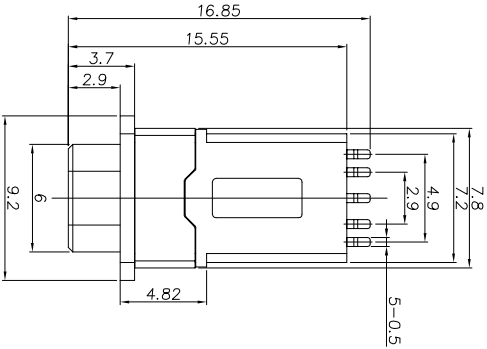

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

SPECIFICATION:

1. Electrical characteristics
1-1. Current rating:DC 0.5A max.
1-2. Voltage rating:DC 30V.
1-3. Contact resistance:50mΩ max
1-4. Insulation resistance:1000MΩ min. at 500V DC.
1-5. Withstanding voltage:500V AC for 1 minute.
2. Mechanical characteristics
2-1. Life test:5000 cycles min,
2-2. Mating force:3~30N,
Unmating force:3~30N,
3. Temperature range: -40° C~+80° C
4. Dustproof and waterproof grade: IP67

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
7	塑胶外壳	1	PART	Block
6	插脚	1	SUS304-1/2H 0.3t	全区镀金1μ"
5	5#脚	1	CS210-EH T=0.2	全区镀金1μ"
4	4#脚	1	CS210-EH T=0.2	全区镀金1μ"
3	3#脚	1	CS210-EH T=0.2	全区镀金1μ"
2	2#脚	1	CS210-EH T=0.2	全区镀金1μ"
1	1#脚	1	CS210-EH T=0.2	全区镀金1μ"

MEASURE POINT:		(xx)	
QUADRANT POINT		(QP)	
TANGENCY POINT		(TP)	
INTERSECTION POINT		(IP)	
UNLESS OTHERWISE SPECIFIED, TOLERANCE:			
DESIGN cc		DATE 2012/02/19	
CHECKED		DATE	
APPROVED		DATE	
PART NO. EZ-PJ-S32545N-H		REV: X1 SCALE: 1:1	
DRAWING		SIZE: A4 SHEET: 1/1	

深圳市合众益华科技有限公司

TITLE:

PHONE JACK

ASSEMBLY DRAWING



A

B

D

E