







INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								
GND								VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A12&B12A4&B4
SIGNAL NAME	GND VBUS
PCB PAD NO.	C1 C2

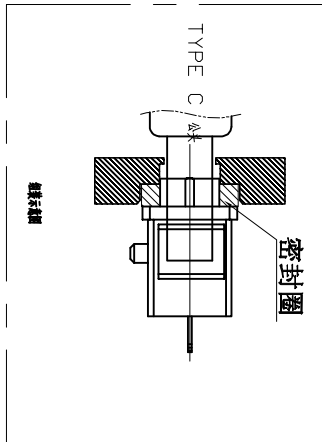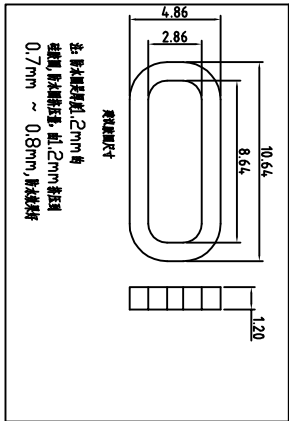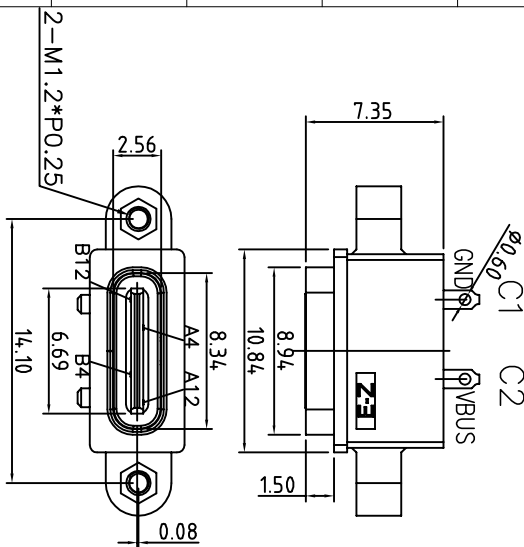

电子线焊接

GND VBUS

外壳攻牙

螺丝过孔

密封圈

使用参考说明图
无需PCB板,可直接焊接
螺丝由外往内锁 达到防水果

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

深圳市合众益华科技有限公司

PART NO. EZ-USBC-1129 TITLE: 2PIN USB Type C

4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni40-160u'i	XX	±0.50	X°	± 2°	UNITS	mm
3	Housing2	1	LCP(G.F30%)	Ni40-120u'i	.X	±0.30	X°	± 1°		
2	Contact	4	Phosphor bronze CS210R-EH Au/Ni Plating T=0.20mm	Ni40-160u'i Au/CuNi Plating AREA3u' OTHER AREAC/G/F	XXX	±0.10	XX°	± 0.5°	MAT'L	
1	Housing	1	PA9T (G.F30%)						FINISH	
ITEM	PARTNAME	QTY	FINISH	NOTE	QTY					