
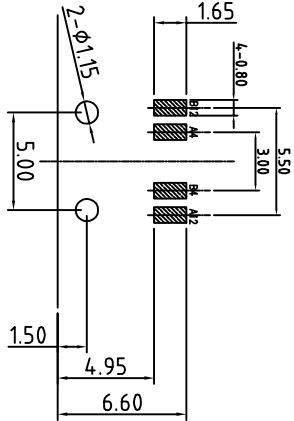
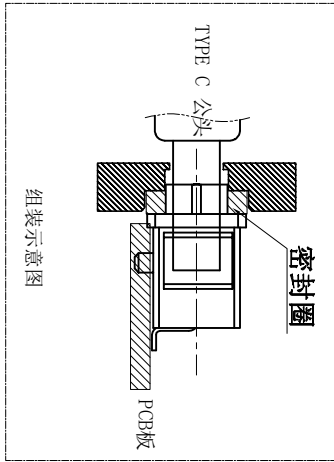






REV.	ECN. NO.	APPD.
------	----------	-------

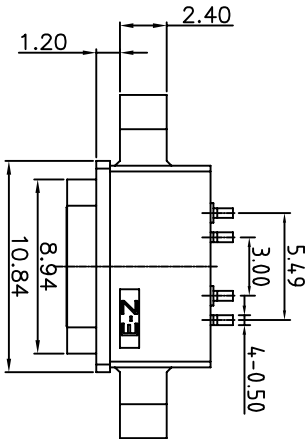

A4	VBUS	B12	GND
A12	GND	B4	VBUS
PIN	SIGNAL NAME	PIN	SIGNAL NAME

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

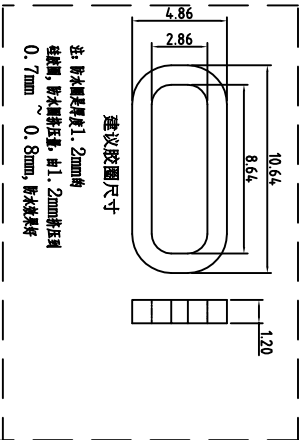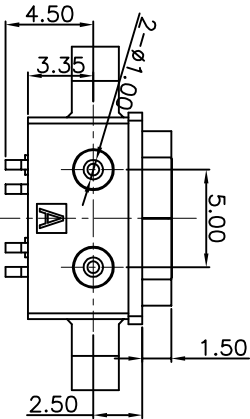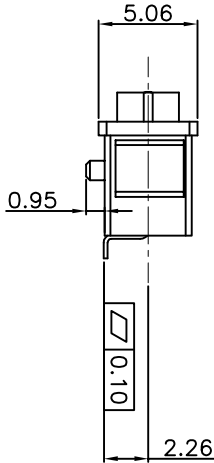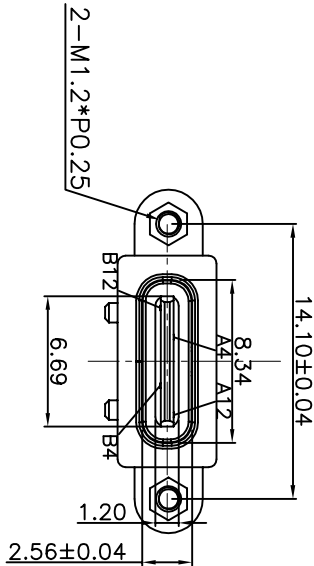

- NOTES:
- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY:5000 CYCLES



深圳市合众益华科技有限公司

4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni:40~120u";	X. ±0.50	X. ° ± 2°	UNITS	mm	PART NO.	TITLE:
3	Housing2	1	LCP(G.F30%)		.X ±0.30	.X° ± 1°			EZ-USBC-1130	TYPE C 4Pin SMT 444
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:30" OTHER AREA:G/F	.XX ±0.10	.XX° ± 0.5°	FINISH	MAT'L		
1	Housing	1	PA9T (G.F30%)		.XXX ± 0.05					
ITEM	PARTNAME	Q'Ty	FINISH	NOTE	Q'TY					

APPD: RADOM

CHKD: MARK

DR: Wu 2020/06/08

DWG NO. : EZ-USBC-1130

SCALE 1/1

SHEET 1/2

REV. A1