
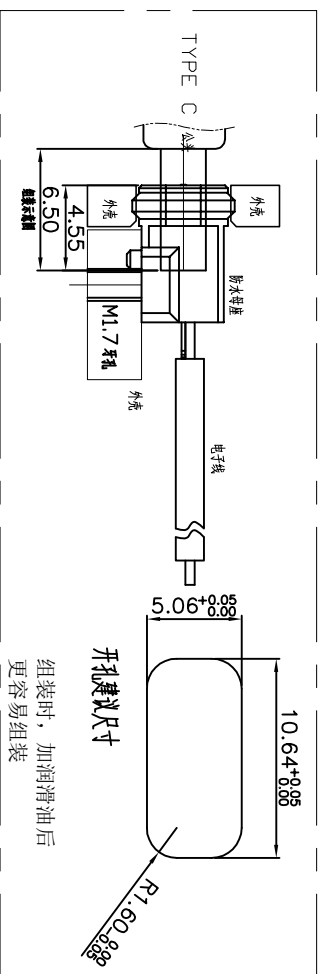
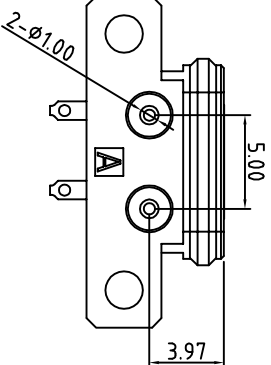

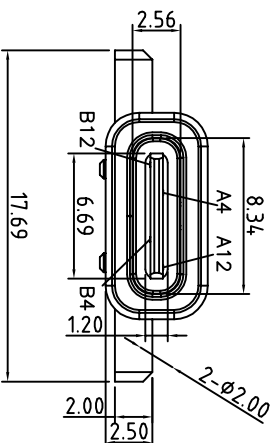


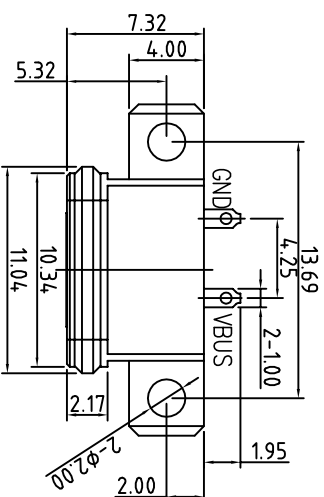

A4	VBUS	B12	GND
A12	GND	B4	VBUS
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES



ITEM	PARTNAME	QTY	FINISH	NOTE
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni40-120u _i
3	Housing2	1	LOP(G.F30%)	
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni40-160u _i Au/CONTACT AREA=3 OTHER AREA=6/F
1	Housing	1	PA9T (G.F30%)	

X. ± 0.50	X° $\pm 2^\circ$	UNITS mm
.X ± 0.30	.X° $\pm 1^\circ$	
.XX ± 0.10	.XX° $\pm 0.5^\circ$	
.XXX ± 0.05		

PART NO.	TITLE
EZ-USBC-1139	2PIN4线USB水口TYPEC

APPD:	RANDOM		
CHKD:			
MARK			
DR:	wujy 2021/02/02		
DWG NO: EZ-USBC-1139			
 		SCALE	REV.
		1/1	A1
		1/2	