
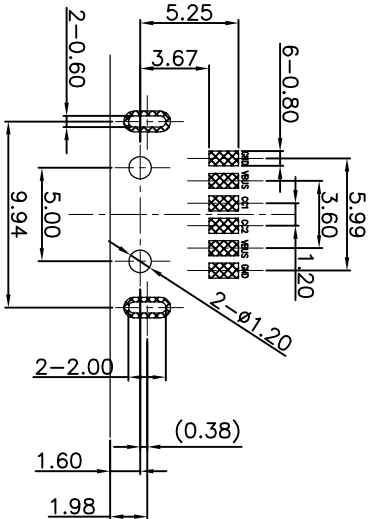
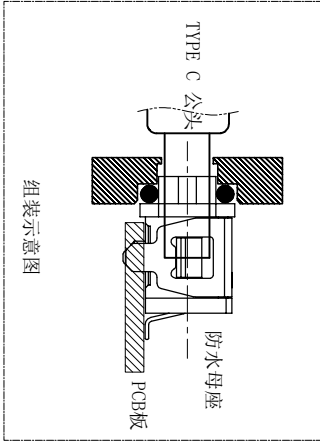



注：防水圈是圆形截面，直径为1.0mm的硅胶圈，防水圈挤压力，由1.0mm挤压到0.4mm ~ 0.5mm, 防水效果好

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

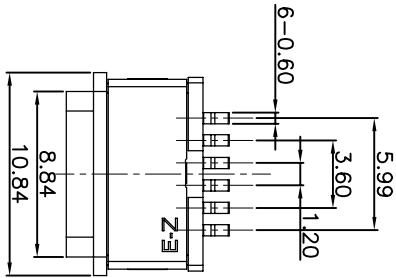

- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY:5000 CYCLES

深圳市合众益华科技有限公司

PART NO. EZ-USBC-1102
TITLE: TYPE C 6Pin SMT Type

APPD: RADOM
CHKD: MARK
DWC NO.: EZ-USBC-1102
SCALE: 1/1
SHEET: 1/2
REV: A1

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	Shell2	1	SUS301 Ni Plating T=0.20mm	Ni: 40~120u";
4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni: 40~120u";
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze CS210R-EH Au/Ni Plating T=0.20mm	Ni: 40~160u"; Au: CONTACT AREA: 3u"; OTHER AREA: G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

X.	±0.50	X.°	±2°	UNITS
.X	±0.30	.X°	±1°	mm
.XX	±0.10	.XX°	±0.5°	MAT'L
.XXX	±0.05			

PART NO. EZ-USBC-1102
TITLE: TYPE C 6Pin SMT Type

APPD: RADOM
CHKD: MARK
DWC NO.: EZ-USBC-1102
SCALE: 1/1
SHEET: 1/2
REV: A1