
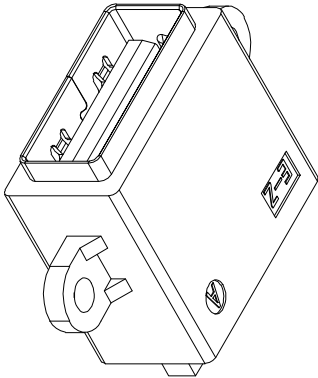




REV.	REV. NO.	APPR.

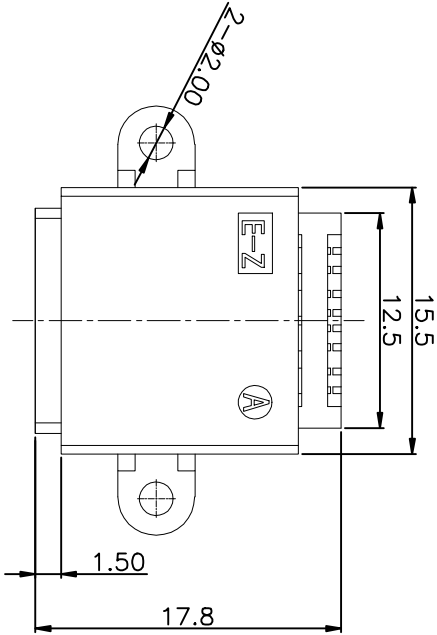

NOTES:


SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES

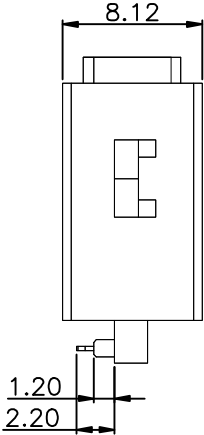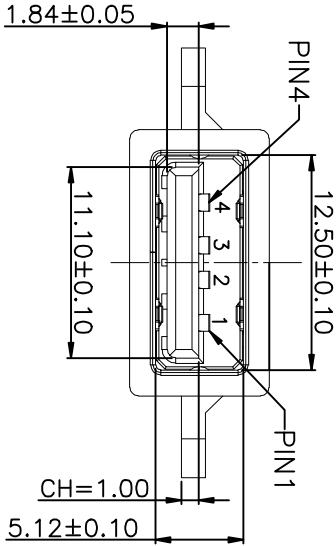


由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作


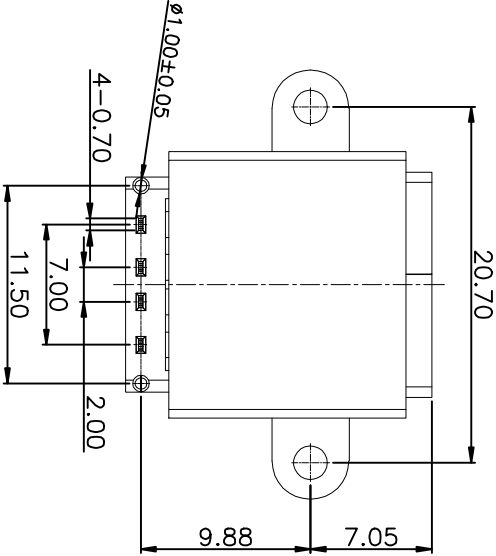


3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE
K. ± 0.50	X. ° ± 2°	UNITS		
.X ± 0.30	.X° ± 1°	mm		
.XX ± 0.10	.XX° ± 0.5°	MAT'L		
.XXX ± 0.05				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY. E-ZONE ELECTRONIC TECHNOLOGY E-ZONE CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD		FINISH		
		Q'TY		
深圳市合众益华科技有限公司		PART NO.	EZ-USB-1192-RC300	TITLE: SUS316 2.0 A TYPE
APPD: RUDOM		CHKD: MARK	DR: JANE CHOU 2018/08/25	DWG NO.: EZ-USB-1192-RC300
		SCALE	1/1	SHEET
		REV.	1/2	A2

REV.	ECN. NO.	APPD.

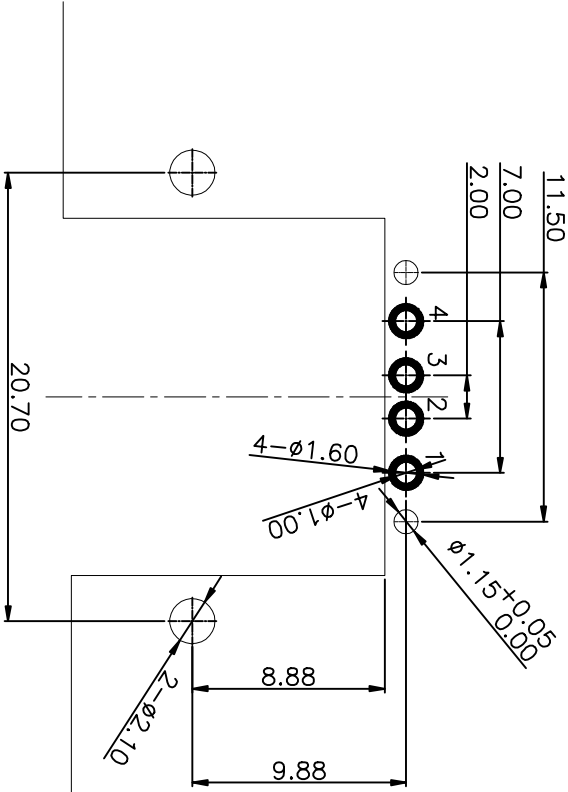

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS T=1.6mm
DEFAULT TOLERANCE+/-0.05

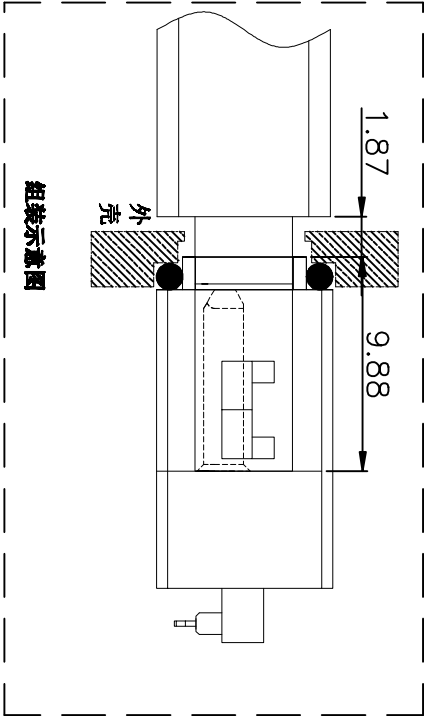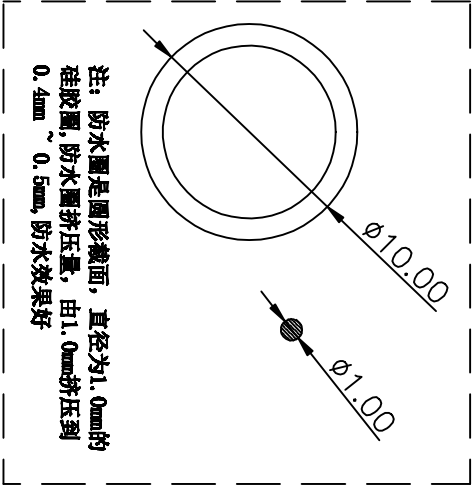

PIN ASSIGNMENT

PIN NO.	1	2	3	4
SIGNAL NAME	VBUS	D-	D+	GND

注意此母座为反脚位。

深圳市合众益华科技有限公司									
X. ± 0.50			X.° ± 2°			UNITS			
.X ± 0.30			.X° ± 1°			mm			
.XX ± 0.10			.XX° ± 0.5°			MAT'L			
.XXX ± 0.05									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.						FINISH			
						q' TY			
APPD: RUDOM						PART NO.			
EZ-USB-1192-RC300						TITLE:			
CHKD: MARK						SHEET NO. 1 OF 1			
DR: JANE CHOU 2018/07/13						DWG NO.:			
EZ-USB-1192-RC300						SCALE			
						1/1			
						2/2			
						REV.			
						A1			