
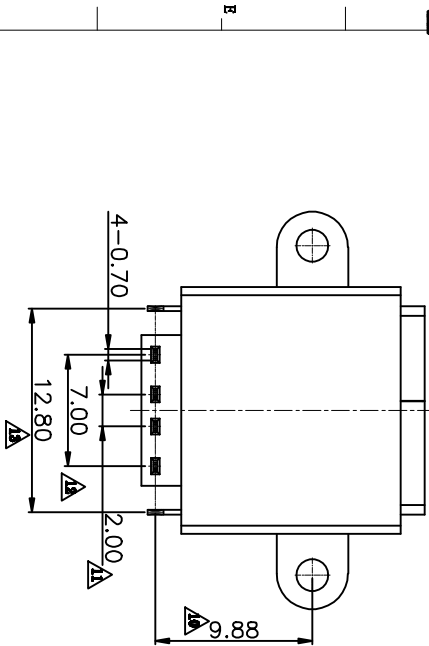
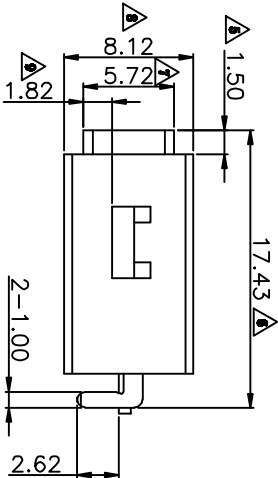


CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	EXC. NO.	APPD.

NOTES:
SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE :8N~35N
- UNMATING FORCE: 8N~35N
- DURABILITY:1500 CYCLES

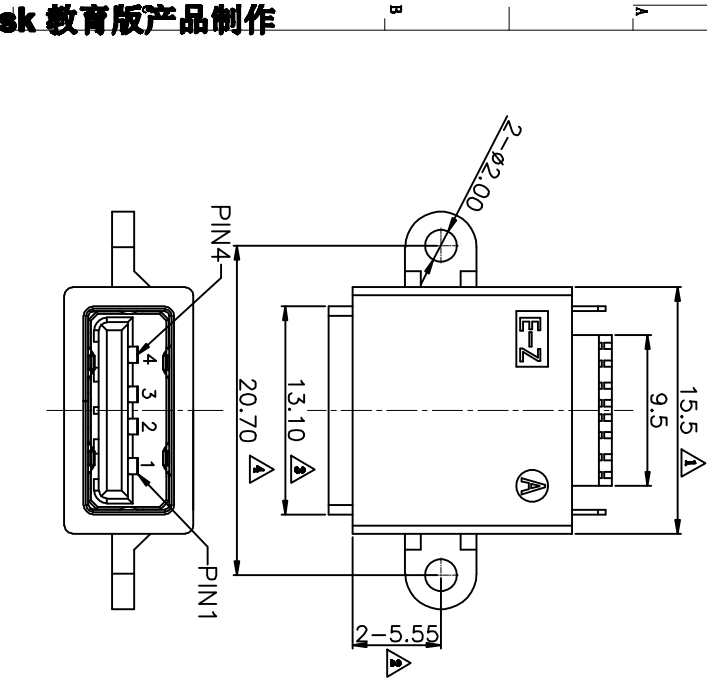

3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH1=0.25mm Au/Ni Plating	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

X. ±0.50	X.° ±2°	UNITS	深圳市合众益华科技有限公司
X ±0.30	.X° ±1°	mm	
.XX ±0.10	.XX° ±0.5°	MAT'L	
.XXX ±0.05			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD			
FINISH			
Q'TY			
PART NO. E2-USB-1192A-RC300			
TITLE: SERISE USB 2.0 A TYPE			
APPD: RANDM			
CHKD: MARK			
DR: JANE CHU 2019/04/16			

DWG NO. :

DATE :

BY :

CHECKED BY :

APPROVED BY :

SCALE :

SHEET :

REV. :

NO. :

E2-USB-1192A-RC300

1/1

1/2

A2

SCALE

SHEET

REV.

1/1

1/2

A2

1/1

1/2

A2

1/1

1/2

A2

1/1


1/2

A2

1/1


1/2

A2

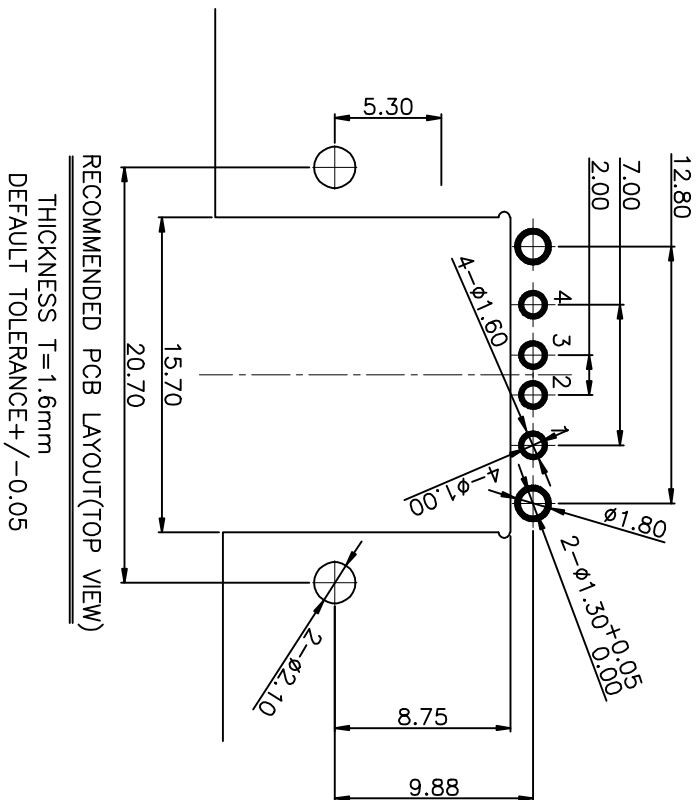


RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.6mm
DEFAULT TOLERANCE+/-0.05

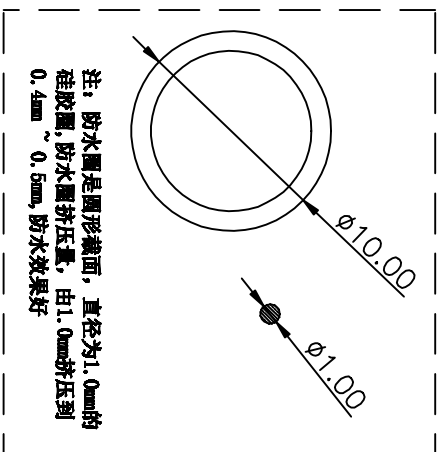

注:防水圈是圆形截面,直径为1.0mm的硅胶圈,防水圈挤压力,由1.0mm挤压到0.4mm~0.5mm,防水效果好

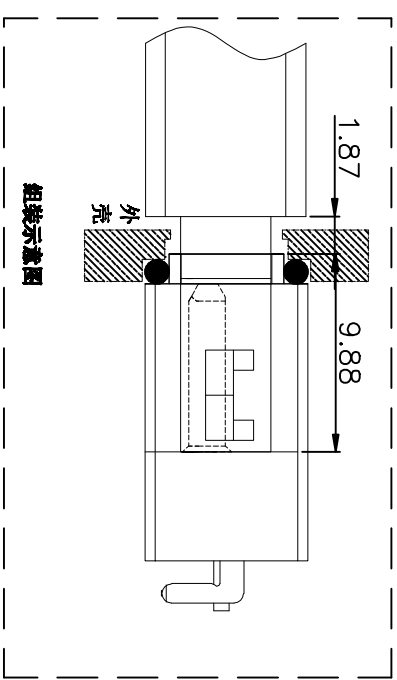

組裝示意图

PIN ASSIGNMENT			
PIN NO.	1	2	3
SIGNAL NAME	V _{BI} S	D-	D+
			GND

注意此母座为反脚位。

X. ±0.50		X.° ± 2°	UNITS
.X ±0.30		.X° ± 1°	mm
.XX ± 0.10		.XX° ± 0.5°	MAT'L
.XXX ± 0.05			
THESE DIMENSIONS AND SPECIFICATIONS ARE THE PROPERTY OF "E-ZONE" ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF "E-ZONE" ELECTRONIC TECHNOLOGY CO., LTD			FINISH
			QTY
APPD: RUDOM		CHGD: MARK	
DATE: JUN 09 2019/04/16			
DWG NO. : EZ-USB-1192A-RC300		TITLE: SERIAL NO 3.01 TTR	
		SCALE SHEET REV.	
1/1		2/2 A1	