
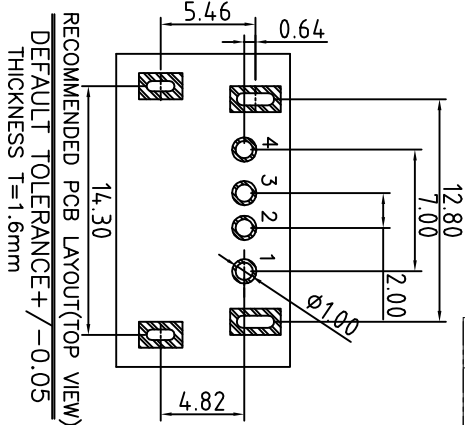
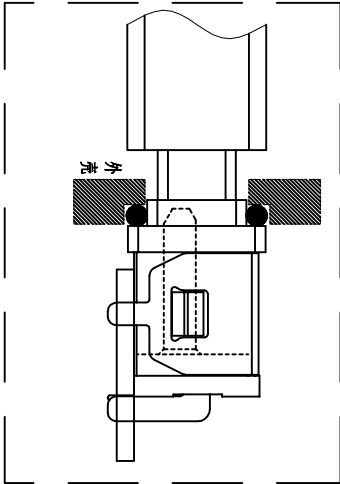
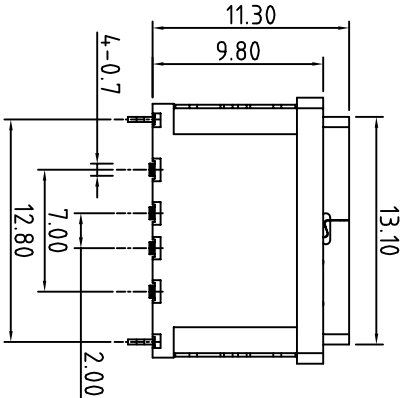



CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

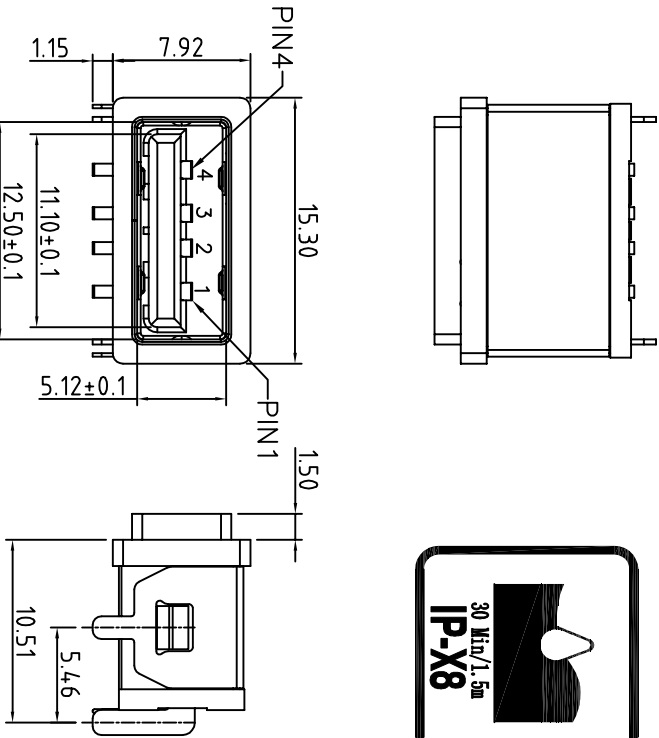

PIN ASSIGNMENT				
PIN NO.	1	2	3	4
SIGNAL NAME	VBUS	D-	D+	GND

NOTES:
SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 8N~35N
- UNMATING FORCE: 8N~35N
- DURABILITY:1500 CYCLES

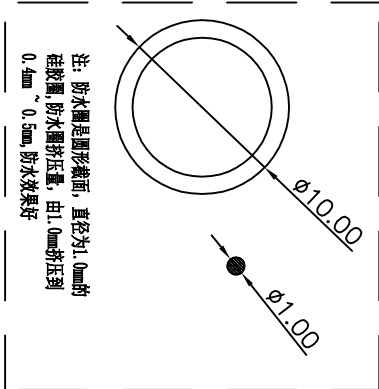

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H Ni Plating	Ni: 40~120U"
3	PLASTIC Shell	1	PA10T (G.F30%)	BLACK UL94-V0
2	Contact	4	BRASS C2680-EH Au/Ni/FoggingIn Plating T=0.25mm	N40-160U" AuContact Area3U", Other AreaFogging 1u.
1	Housing	1	PA10T (G.F30%)	BLACK UL94-V0

X.	± 0.50	X.*	± 2°	UNITS	mm
X	± 0.30	X*	± 1°		
.XX	± 0.10	.XX*	± 0.5°	MAT'L	
.XXX	± 0.05				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD				FINISH	
				Q'TY	
				DR:	JANE CHOU 2019/07/11
				DWG NO: EZ-USBA-1195	
				TITLE: IP68 USB 2.0 A TYPE	
				APPD:	RADDM
				CHKD:	MARK
				EZ-USBA-1195	
				SCALE	1/1
				SHEET	1/2
				REV.	A2

深圳市合众益华科技有限公司