
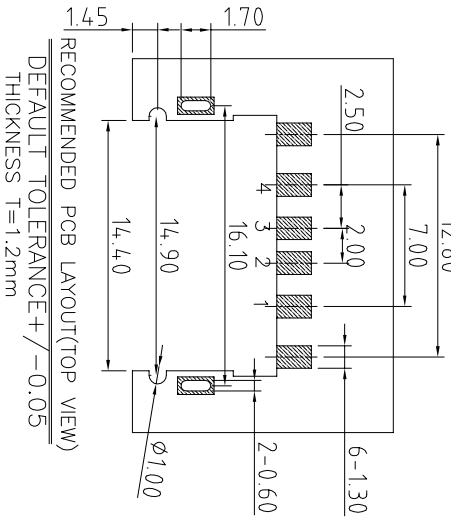
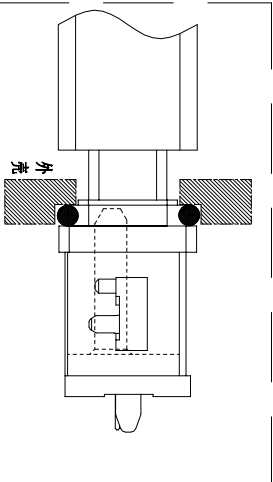



CAD GENERATED DRAWING. DON'T CHANGE BY HAND.




PIN ASSIGNMENT

PIN NO.	1	2	3	4
SIGNAL NAME	VBUS	D-	D+	GND

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE :8N~35N
- UNMATING FORCE: 8N~35N
- DURABILITY:1500 CYCLES



注: 防水圈是圆形截面, 直径为1.0mm的
硅胶圈, 防水圈挤压量, 由1.0mm挤压到
0.4mm ~ 0.5mm, 防水效果好



3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	
ITEMPART NAME		Q'TY	FINISH	NOTE

X.	± 0.50	X.*	± 2°	UNITS	mm
X	± 0.30	X*	± 1°		
.XX	± 0.10	.XX*	± 0.5°	MAT'L	
XXX	± 0.05				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD				FINISH	
				Q'TY	
				DR	JANE CHOU 2019/07/11
				DWG NO: EZ-USB A-1196	
				TITLE: IP68 USB 2.0 A TYPE 類 A TYPEC	
				APPD: RADOM	
				CHKD: MARK	
				EZ-USB A-1196	
				SCALE	1/1
				SHEET	1/2
				REV.	A2

深圳市合众益华科技有限公司