
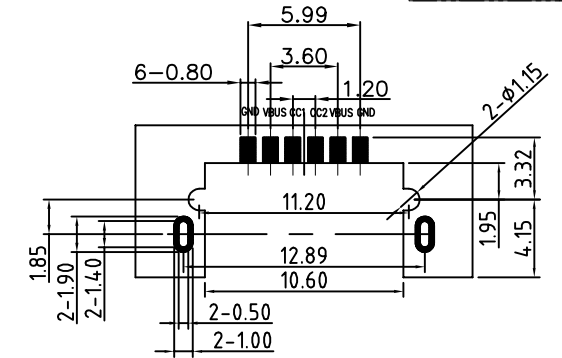
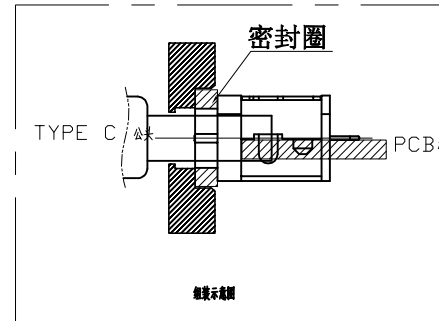
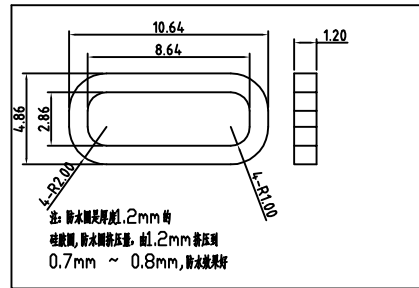
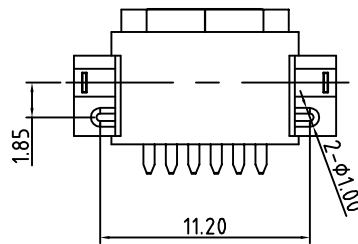
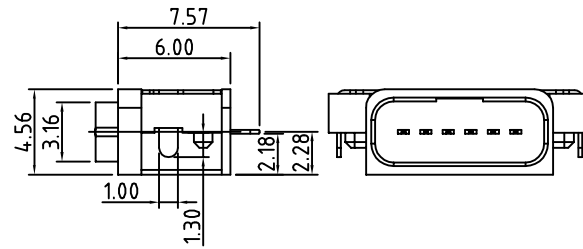


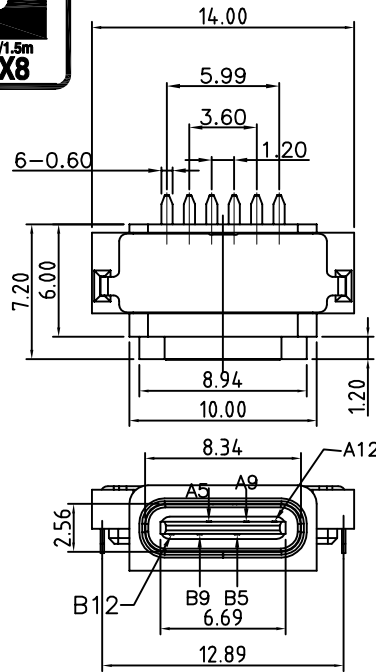

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

5	Shell2	1	SUS304 Ni Plating T=0.20mm	Ni40~120u ^r ;
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni40~120u ^r ;
3	Housing2	1	LCP(G.F30%)	
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni40~160u ^r ; AuCONTACT AREA:3 OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PARTNAME	Q'TY	FINISH	NOTE

T	UNITS	
	mm	
	MAT'L	
	FINISH	
	Q'TY	

深圳市合众益华科技有限公司					
PART NO.			TITLE:		
EZ-USBC-1123-6PIN			6PIN 连接器 TYPEC		
APPD: RAOOM			DWG NO:		
CHKD:			EZ-USBC-1123-6PIN		
MARK					
DR: wujy 2021/02/02					
			SCALE	SHEET	REV.
			1/1	1/2	A1