

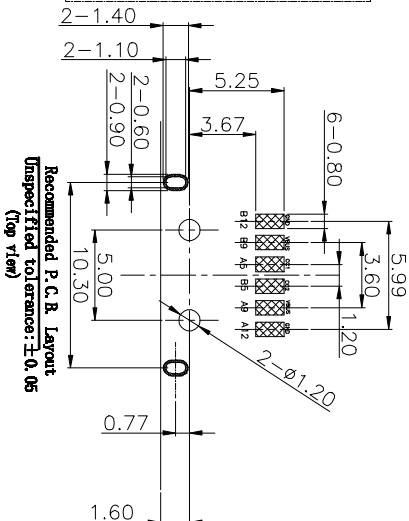
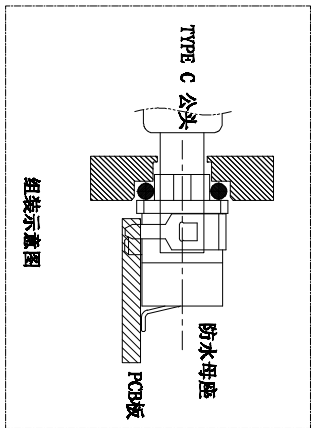
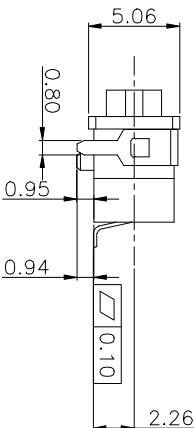




CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

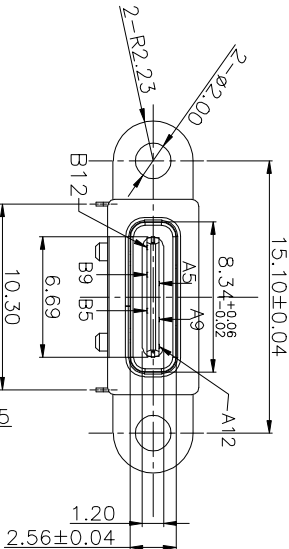

Recommended P.C.B. Layout
Unspecified tolerance: ±0.05
(Top view)

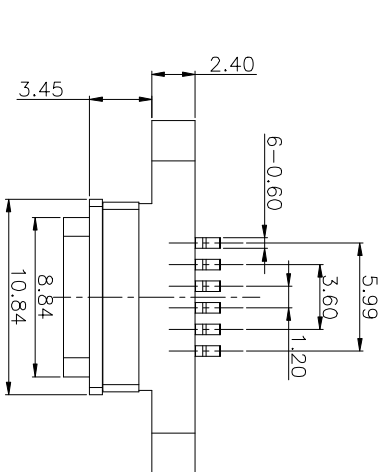

由 Autodesk 教育版产品制作

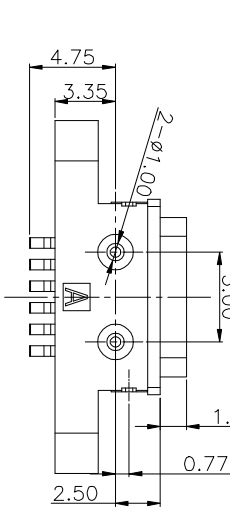

注：防水圈是圆形截面，直径为1.0mm的
硅胶圈，防水圈挤压力，由1.0mm挤压力到
0.4mm ~ 0.5mm，防水效果好

- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY:5,000 CYCLES

5	Shell2	1	SUS301 Ni Plating T=0.20mm	Ni:40~120u"
4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40~120u"
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u" Au:CONTACT Area1.3u" OTHER AREA:6/F
1	Housing	1	PA9T (G.F30%)	
FINISH				
A5	CC1	B12	GND	
A9	VBUS	B9	VBUS	
A12	GND	B5	CC2	
PIN	SIGNAL NAME	PIN	SIGNAL NAME	

X	±0.50	X°	±2°	UNITS
.X	±0.30	.X°	±1°	mm
.XX	±0.10	.XX°	±0.5°	MAT'L
.XXX	±0.05			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EZ-ZONE ELECTRONIC TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF EZ-ZONE ELECTRONIC TECHNOLOGY CO., LTD				
FINISH				
Q' TY				

深圳市合众益华科技有限公司			
PART NO.	EZ-USBC-1103U	TITLE:	TPE C 6Pin SMT Type
APPD:	RADDW	DRG NO.:	EZ-USBC-1103U
CHKD:	MARK	DR:	join 2021/05/18
SCALE		1/1	1/2
SHEET		REV.	A1

由 Autodesk 教育版产品制作