



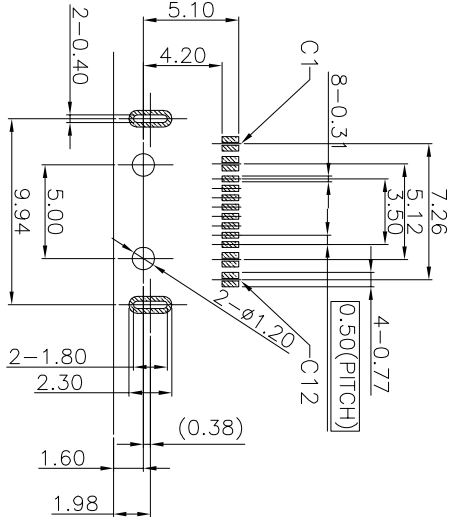






INTERFACE(FRONT VIEW)															
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12				
				VBUS	CC1	DP1	DN1	SBU1	VBUS						
GND				VBUS	SBU2	DN2	DP2	CC2	VBUS						
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1				

PIN ASSIGNMENT

PIN NO.	A1&B12	A4&B9	B8	A5	B7	A6	A7	B6	A8	B5	A9&B4	A12&B1
SINGAL NAME	GND	VBUS	SBU2	CC1	DN2	DP1	DN1	DP2	SBU1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12

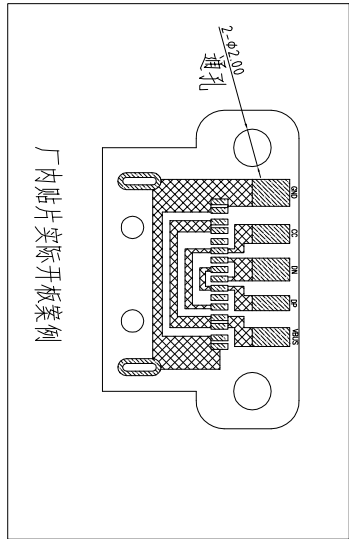

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS T=1.0mm
DEFAULT TOLERANCE+0.05

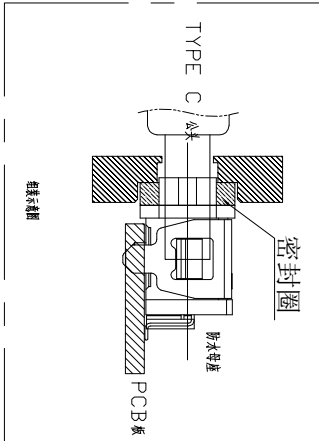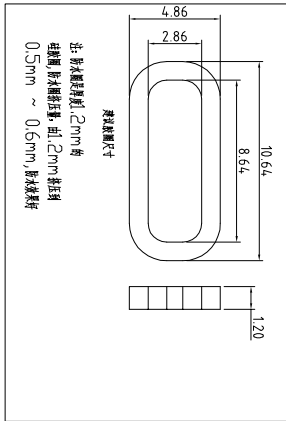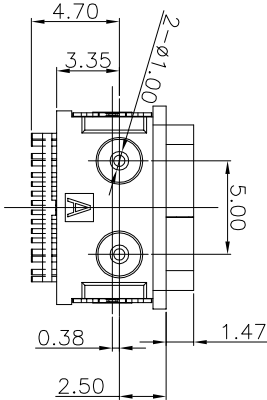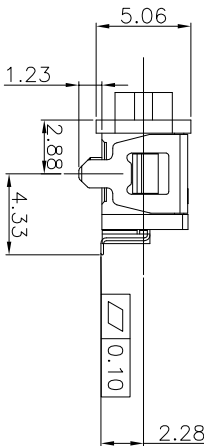

- NOTES:
1. MATERIAL: SEE "TABLE 1";
 2. FINISH: SEE "TABLE 1";
 3. ELECTRICAL :
 - 3-1.CONTRACT CURRENT RATING :
5A(VBUS PIN 1.5A/PIN),
5A(GND PIN 1.25A/PIN MAX)0.25A/PIN(OTHER PIN).
 - 3-2.INSULATION RESISTANCE :
100 MEGAOHMS MIN. AT 250VDC.
 - 3-3.DIELECTRIC WITHSTANDING VOLTAGE :
100VAC MIN.
 - 3-4.LOW LEVEL CONTACT RESISTANCE :
INITIAL 40mΩ MAX.
AFTER 50mΩ MAX.
 - 4.MECHANICAL CHARACTERISTICS :
 - 4-1. MATING FORCE: 5~20N;
 - 4-2. UNMATING FORCE: 8~20N(INITIAL)6~20N(AFTER 10000 CYCLES);
 - 4-3.DURABILITY : 10,000 MATING CYCLES.
 - 4-4.OPERATING TEMPERATURE : -40°C TO +80°C

TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑥	Shell-2	1	Stainless steel	NI PLATING:	T=0.20mm
⑤	Shell-1	1	Stainless steel	NI PLATING:	T=0.25mm
④	MID PLATE	1	Stainless steel	T=0.15mm	
③	Terminal-B	8	铜镍钛合金	T=0.15mm	
②	Terminal-A	8	铜镍钛合金	T=0.15mm	
①	Housing	1	HIGH TEMP	Block	

X.	±0.50	X.*	±2°	UNITS	mm
X	±0.30	X*	±1°		
XX	±0.10	XX*	±0.5°	MAT'L	
XXX	±0.05				

深圳市合众益华科技有限公司

PART NO. EZ-USBC-1118-PCB		TITLE: TYPE C 16Pin SMT Type		
APPD: RADDM	DWG NO: EZ-USBC-1118-PCB			
CHKD: MARK				
DR: WUJY 2020/08/18				
		SCALE	SHEET	REV.
		1/1	1/2	A1