
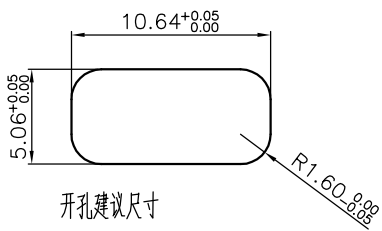
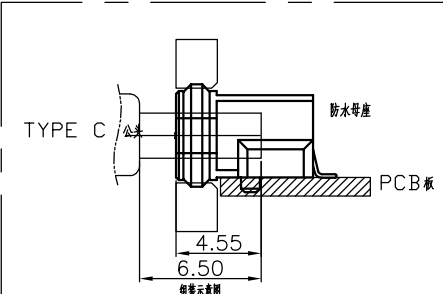


由Autodesk 教育版产品制作

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

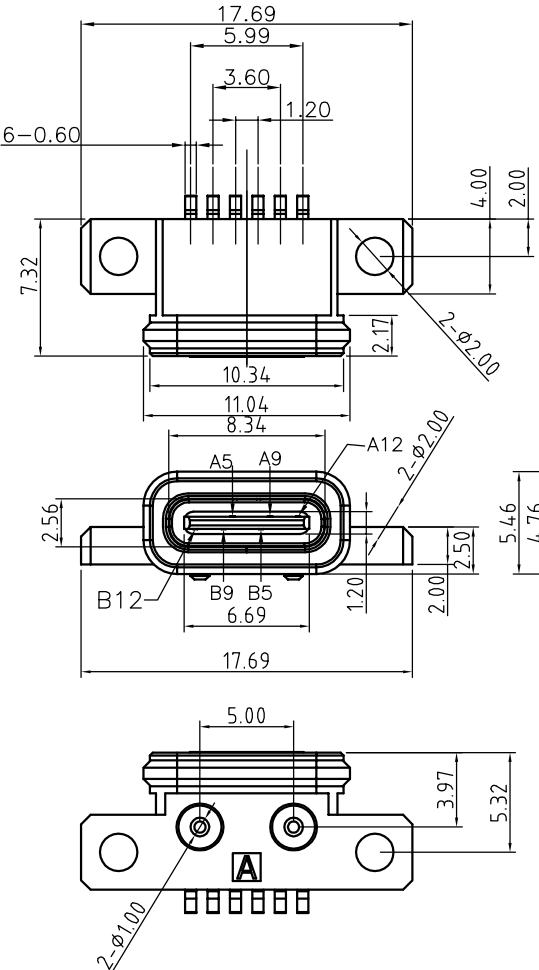

组装时，加润滑油后更容易组装



- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY:5000 CYCLES

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

ITEM	PARTNAME	Q'TY	FINISH	NOTE
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni40~120u ⁺
3	Housing2	1	LCP(G.F30%)	Ni40~120u ⁺
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni40~160u ⁺ Au CONTACT AREA:3u OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	

X.	±0.50	X.*	± 2*	UNITS	mm
.X	±0.30	.X.*	± 1*		
.XX	±0.10	.XX.*	± 0.5*	MAT'L	
.XXX	± 0.05				
				FINISH	
				Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD

深圳市合众益华科技有限公司			
PART NO. EZ-USBC-1137-6PIN		TITLE: TYPE C 6Pin SMT Type	
APPD: RADOM		DWG NO: EZ-USBC-1137-6PIN	
CHKD: MARK			
DR: JOIN 2021/02/02			
SCALE	SHEET	REV.	
1/1	1/2	A1	