
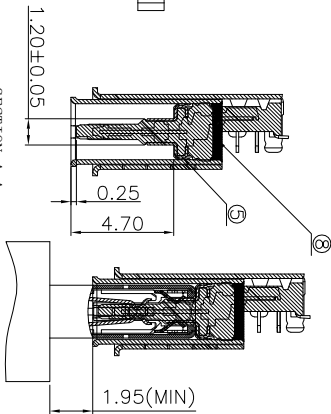
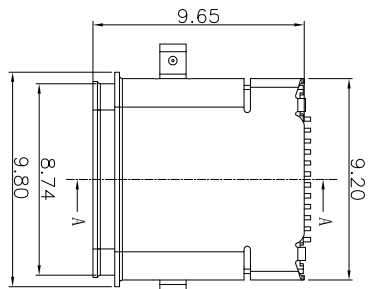
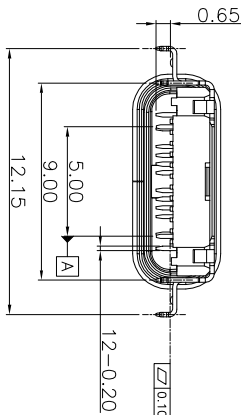
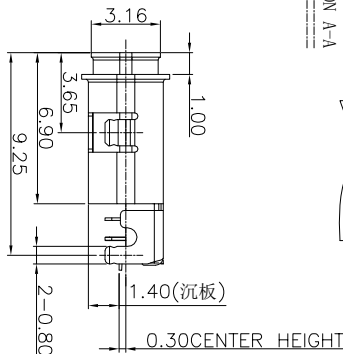



Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTxp1	Second	B11	SSRxp1	Second
A3	SSTxm1	Second	B10	SSRxm1	Second
A4	Vss	First	B9	Vss	First
A5	CC1	Second	B8	SBt2	Second
A6	Dp1	Second	B7	Dm2	Second
A7	Dm1	Second	B6	Dp2	Second
A8	SH1	Second	B5	CC2	Second
A9	Vss	First	B4	Vss	First
A10	SSRxm2	Second	B3	SSTxp2	Second
A11	SSRxp2	Second	B2	SSTxp2	Second
A12	GND	First	B1	GND	First

SECTION A-A

Detail 1

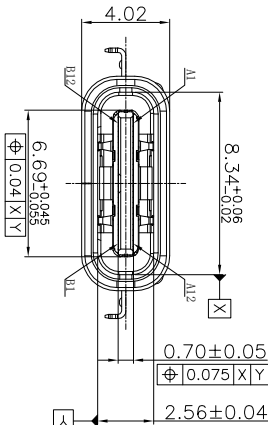

LASER WELDING POINT

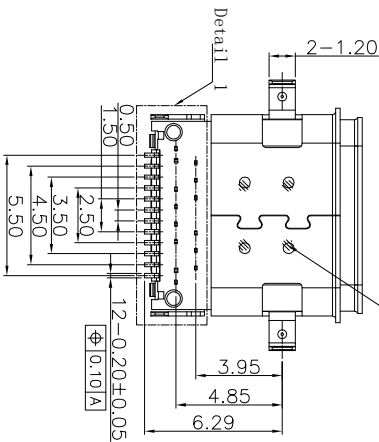

RECOMMENDED P.C.B LAYOUT(Both sides are sample)
Tolerance:±0.05,Thickness=0.60mm

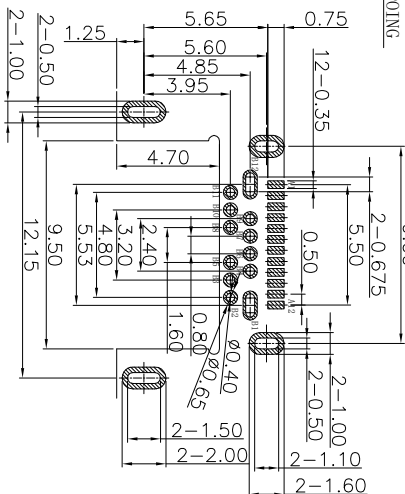


TABLE 1:

⑧	GLUE WATER	1	EPOXY	BLACK:	
⑦	Shell-2	1	Stainless steel	N PLATING:	T=0.20mm
⑥	Shell-1	1	Stainless steel	N PLATING:	T=0.20mm
⑤	GND PLATE	1	Stainless steel	N PLATING:	T=0.10mm
④	MID PLATE	1	Stainless steel		T=0.15mm
③	Terminal-B	12		TABLE 2	T=0.12mm
②	Terminal-A	12		TABLE 2	T=0.12mm
①	Housing	1	HIGH TEMP	Block	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK

UNLESS OTHERWISE,
GENERAL TOLERANCE:
X.xxx ±0.10
X.xx ±0.20
X.x ±0.30
X. ±0.38
ANGULAR:
X.xx ±1°
X.x ±3°
X. ±5°

深圳市合众益华科技有限公司
SHENZHEN HEZHONGYI HUA ELECTRONIC TECHNOLOGY CO., LTD.

2019.05.17	MARK	DESIGN	MARK	2019.05.17
2019.04.17	RD00M	CHECK	RD00M	2019.05.17
2018.10.17	WUJU	APPROVAL	WUJU	2019.05.17
ECN NO.	REV.	DESCRIPTION	DATE	CHANGE



